



LED (Light Emitting Diode) est un composant électronique transformant l'électricité en lumière. Aujourd'hui, la led va bien au-delà de l'éclairage du simple circuit électronique.

Les directives européennes obligent à changer les modes d'éclairage dès 2010. Les premiers acteurs de ce changement seront en priorité les entreprises, les collectivités locales et l'Etat. Ce sont eux qui montreront l'exemple en matière de responsabilité environnementale.

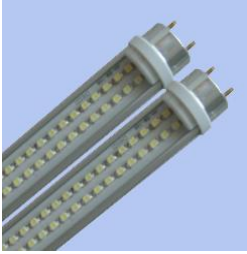
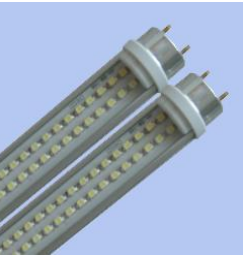

Les éclairages par Led offrent la réponse la plus avancée en matière d'économie et d'écologie pour l'éclairage public, industriel et commercial.

Les éclairages par Led offrent des performances inégalées à ce jour et des conditions optimales d'utilisation par rapport à tous les modes d'éclairage basse consommation existants. Ils combinent tous les avantages.

Les Led ont une durée de vie de plus de 50 000 heures ! Cela équivaut à 10 ans pour un éclairage journalier de 10 heures. Leur installation ne demande donc aucune maintenance. Leurs composants, par leur nature, très solides, les rendent peu sensibles aux chocs et aux vibrations contrairement aux sources classiques. A lumière égale, ils économisent de 50% à 92% d'électricité, selon le cas, par rapport à une lampe classique.

LED (Light Emitting Diode) è un componente elettronico che trasforma l'elettricità in luce. Le direttive europee impongono il cambiamento degli impianti illuminanti sin dal 2010. I primi ad adeguarsi alla nuova normativa saranno in priorità le imprese, le comunità locali e lo Stato, sono coloro che daranno l'esempio in materia di responsabilità ambientale. La illuminazione con impianti a Led offre la risposta più avanzata in materia d'economia e d'ecologia per l'illuminazione pubblica, industriale e commerciale. Gli impianti d'illuminazione Led offrono prestazioni da record in condizioni ottimali di funzionamento rispetto a tutti gli altri sistemi d'illuminazione a basso consumo attualmente presenti sul mercato. Innumerevoli sono i vantaggi degli impianti d'illuminazione a Led; i più importanti sono: la durata di vita di oltre 50.000 ore! Ciò equivale a 10 anni per una illuminazione quotidiana di 10 ore; assenza di qualsiasi tipo di manutenzione; i componenti delle lampade a LED, per la loro natura, sono molto solidi e poco sensibili alle scosse ed alle vibrazioni contrariamente alle fonti classiche, ma il vantaggio più eclatante è l'economia: ad intensità di luce uguale, le lampade a LED economizzano 50% al 92% d'elettricità, rispetto ad una lampada classica.

LED (Light Emitting Diode) is an electronic device that transforms the electricity in light. The European directives impose the change of the illuminant systems starting from 2010. The first to adapt its lighting system to the EU normative will be in priority the enterprises, the local communities and the State, they are those who will give the example in responsibility matter acclimatizes them. The lighting system with Led lumps, guarantee several advantages in matter of economy and ecology for the public institutions, the industrial activity and commercial and retail activity. The lighting system with Led lumps allow record performances in optimal conditions compared to all the other traditional lighting systems using low consumption technology currently present on the market. Several are the advantages of the LED lighting system; the most important are: the duration of life of beyond 50.000 hours! That is equivalent to 10 years for one daily lighting system of 10 hours; absence of whichever type of maintenance; the led lumps structure, for its nature, is much more solid and low sensitive to the jolt and the vibrations contrarily to the classic lighting system, but the most important is the power economy: compared with equal light intensity, the LED lamps save 50% to 92% of electricity consumption, compared to any classic lamp.

	Model No.	COLOR	LED	LED Qty	Luminous	Dimensions	Voltage	Power	View Angle	Power Factor	Qty/pcs	Unit Price
1200mm T8 LED Tube with Aluminum Base PCB and Cooling Fin, Super Bright SMD3528 (10*23mil)												
	<b>QL-T806-144X-10W</b>	Warm White: (3000K-3500K) Pure White: (6000K-7000K)	SMD 3528 Super Bright	144 LEDs	850-950LM	Φ26*600	AC85-265V 50/60HZ	10W	120°	>0.93	1-500	41,00 €
											501-5000	40,40 €
											5001+	39,60 €
1500mm T8 LED Tube with Aluminum Base PCB and Cooling Fin, Super Bright SMD3528 (10*23mil)												
	<b>QL-T812-288X-18W</b>	Warm White: (3000K-3500K) Pure White: (6000K-7000K)	SMD 3528 Super Bright	288 LEDs	1650-1750LM	Φ26*1200	AC85-265V 50/60HZ	18W	120°	>0.93	1-500	69,00 €
											501-5000	68,00 €
											5001+	66,00 €
	<b>QL-T815-360X-24W</b>	Warm White: (3000K-3500K) Pure White: (6000K-7000K)	SMD 3528 Super Bright	360 LEDs	1900-2000LM	Φ26*1500	AC85-265V 50/60HZ	24W	120°	>0.93	1-500	84,00 €
											501-5000	82,00 €
											5001+	80,00 €

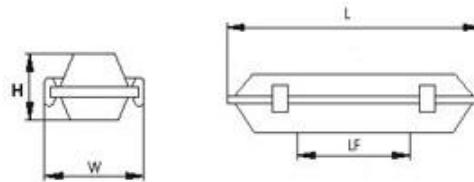


10, bd Princesse Charlotte  
 Monaco  
 Principauté de Monaco  
 www.mvm.mc  
 tel. 00377 9797 5252  
 fax 00377 9797 5253

Code	Description		H.T.
			Prix FOB Monaco
GRID 3x60B Europe size : 595*595*5mm	White 2400 lumen 27 W	27 watt High power led grid lamp. No flickering, No UV elements, good for eyes.  Save 50% power compared with fluorescent energy saving lamp, environment-friendly 1w led used as lamp source Long life-span 50000hours	145,00 €
	Warm white 2100 lumen 27W	27 watt High power led grid lamp. No flickering, No UV elements, good for eyes.  Save 50% power compared with fluorescent energy saving lamp, environment-friendly 1w led used as lamp source Long life-span 50000hours	145,00 €
GRID 4x60B Europe size : 595*595*5mm	White 3200 lumen 36 W	36 watt High power led grid lamp. No flickering, No UV elements, good for eyes.  Save 50% power compared with fluorescent energy saving lamp, environment-friendly 1w led used as lamp source Long life-span 50000hours	185,00 €
	Warm white 2800 lumen 36 W	36 watt High power led grid lamp. No flickering, No UV elements, good for eyes.  Save 50% power compared with fluorescent energy saving lamp, environment-friendly 1w led used as lamp source Long life-span 50000hours	185,00 €



**YH2158T 1x 150 LED** IP65 Waterproof lighting fixtures










**YH2158T € 25 H.T. without TUBE**





规格(W)	防护等级	净重	毛重	搭扣/个	数量个/箱
Max watt	IP Rating	N.T(kg)	G.T(kg)	Clips	Qty/Carton
1x58W	IP65	2.2	2.6	10pcs	6pcs/ctn





净尺寸	L×W×H(mm)	内箱尺寸	L×W×H(mm)	外箱尺寸	L×W×H(mm)	安装距离	LF(mm)
Net Dim	1570×105×108	Box Dim	1580×105×70	Carton Dim	1595×225×235	LF	1340












Picture	Model No.	LED Qty	Work Voltage	Power	View Angle	Waterproof	Packing	Color and Luminous	(CT:K)	Price
										1-50
	QL-F3528A60T-H-12	SMD 3528 120/m (Normal Bright)	DC12V	9.6w/m	120°	No	5m/reel	Warm White: 270lm-300lm Pure White: 300lm-350lm	3000-7000K	82,00 €
	QL-F3528A60TS-H-12	SMD 3528 120/m (Super Bright)	DC12V	19.2w/m	120°	No	5m/reel	Warm White: 540lm-600lm Pure White: 600lm-700lm	3000-7000K	122,00 €
<b>New Products:</b> Waterproof <b>Color-Temperature adjustable</b> Flexible LED Strips, DC12V, SMD3528, 120LEDs/M Single-Side Glued										
	QL-F3528B60T-H-12	SMD 3528 120/m (Normal Bright)	DC12V	9.6w/m	120°	IP65	5m/reel	Warm White: 270lm-300lm Pure White: 300lm-350lm	3000-7000K	92,00 €
<b>New Products:</b> Waterproof <b>Color-Temperature adjustable</b> Flexible LED Strips, DC12V, SMD3528, 120LEDs/M With Silicone Tube										
	QL-F3528C60T-H-12	SMD 3528 120/m (Normal Bright)	DC12V	9.6w/m	120°	IP67	5m/reel	Warm White: 270lm-300lm Pure White: 300lm-350lm	3000-7000K	92,00 €
<b>New Products:</b> Waterproof <b>Color-Temperature adjustable</b> Flexible LED Strips, DC12V, SMD3528, 120LEDs/M Tube+Glue										
	QL-F3528E60T-H-12	SMD 3528 120/m (Normal Bright)	DC12V	9.6w/m	120°	IP68	5m/reel	Warm White: 270lm-300lm Pure White: 300lm-350lm	3000-7000K	94,00 €




Picture	Model No.	LED Qty	Work Voltage	Power	View Angle	Waterproof	Packing	Color	λ(Nm)/(CT:K)	Luminous Flux	Price
											1-50
<b>Non-Waterproof Flexible LED Strips, DC12V, SMD 3528, 60LEDs/M</b>											
	QL-F3528A30-R-12	SMD 3528 60/m	DC12V	4.8w/m	120°	NO	5m/reel	■ Red	620-630	80-100	44,00 €
	QL-F3528A30-Y-12							■ Yellow	585-595	80-100	
	QL-F3528A30-B-12							■ Blue	455-470	70-90	
	QL-F3528A30-G-12							■ Green	510-525	200-220	
	QL-F3528A30-P-12							□ Pure White	6000-7000K	310-330	
	QL-F3528A30-W-12							□ Warm White	3000-3500K	260-280	
<b>Waterproof Flexible LED Strips, DC12V, SMD 3528, 60LEDs/M, Single-Side Glued</b>											
	QL-F3528B30-R-12	SMD 3528 60/m	DC12V	4.8w/m	120°	IP 65	5m/reel	■ Red	620-630	80-100	54,00 €
	QL-F3528B30-Y-12							■ Yellow	585-595	80-100	
	QL-F3528B30-B-12							■ Blue	455-470	70-90	
	QL-F3528B30-G-12							■ Green	510-525	200-220	
	QL-F3528B30-P-12							□ Pure White	6000-7000K	310-330	
	QL-F3528B30-W-12							□ Warm White	3000-3500K	260-280	
<b>Waterproof Flexible LED Strips, DC12V, SMD 3528, 60LEDs/M, With Silicone Tube</b>											
	QL-F3528C30-R-12	SMD 3528 60/m	DC12V	4.8w/m	120°	IP 67	5m/reel	■ Red	620-630	80-100	54,00 €
	QL-F3528C30-Y-12							■ Yellow	585-595	80-100	
	QL-F3528C30-B-12							■ Blue	455-470	70-90	
	QL-F3528C30-G-12							■ Green	510-525	200-220	
	QL-F3528C30-P-12							□ Pure White	6000-7000K	310-330	
	QL-F3528C30-W-12							□ Warm White	3000-3500K	260-280	
<b>Waterproof Flexible LED Strips, DC12V, SMD 3528, 60LEDs/M, Tube+Glued</b>											
	QL-F3528E30-R-12	SMD 3528 60/m	DC12V	4.8w/m	120°	IP 68	5m/reel	■ Red	620-630	80-100	56,00 €
	QL-F3528E30-Y-12							■ Yellow	585-595	80-100	
	QL-F3528E30-B-12							■ Blue	455-470	70-90	
	QL-F3528E30-G-12							■ Green	510-525	200-220	
	QL-F3528E30-P-12							□ Pure White	6000-7000K	310-330	
	QL-F3528E30-W-12							□ Warm White	3000-3500K	260-280	



Picture	Model No.	LED Qty	Work Voltage	Power	View Angle	Waterproof	Packing	Color	λ(Nm)/(CT:K)	Luminous Flux	Price/Re
											1-50
<b>Non-Waterproof Flexible LED Strips, DC12V, SMD 3528, 120LEDs/M</b>											
	QL-F3528A60-R-12	SMD 3528 120/m	DC12V	9.6w/m	120°	NO	5m/reel	■ Red	620-630	160-200	80,00 €
	QL-F3528A60-Y-12							■ Yellow	585-595	160-200	
	QL-F3528A60-B-12							■ Blue	455-470	140-180	
	QL-F3528A60-G-12							■ Green	510-525	400-440	
	QL-F3528A60-P-12							□ Pure White	6000-7000K	620-660	
	QL-F3528A60-W-12							□ Warm White	3000-3500K	520-560	
<b>Waterproof Flexible LED Strips, DC12V, SMD 3528, 120LEDs/M, Single-Side Glued</b>											
	QL-F3528B60-R-12	SMD 3528 120/m	DC12V	9.6w/m	120°	IP65	5m/reel	■ Red	620-630	160-200	90,00 €
	QL-F3528B60-Y-12							■ Yellow	585-595	160-200	
	QL-F3528B60-B-12							■ Blue	455-470	140-180	
	QL-F3528B60-G-12							■ Green	510-525	400-440	
	QL-F3528B60-P-12							□ Pure White	6000-7000K	620-660	
	QL-F3528B60-W-12							□ Warm White	3000-3500K	520-560	
<b>Waterproof Flexible LED Strips, DC12V, SMD 3528, 120LEDs/M, With Silicone Tube</b>											
	QL-F3528C60-R-12	SMD 3528 120/m	DC12V	9.6w/m	120°	IP67	5m/reel	■ Red	620-630	160-200	90,00 €
	QL-F3528C60-Y-12							■ Yellow	585-595	160-200	
	QL-F3528C60-B-12							■ Blue	455-470	140-180	
	QL-F3528C60-G-12							■ Green	510-525	400-440	
	QL-F3528C60-P-12							□ Pure White	6000-7000K	620-660	
	QL-F3528C60-W-12							□ Warm White	3000-3500K	520-560	
<b>Waterproof Flexible LED Strips, DC12V, SMD 3528, 120LEDs/M, Tube+Glued</b>											
	QL-F3528E60-R-12	SMD 3528 120/m	DC12V	9.6w/m	120°	IP68	5m/reel	■ Red	620-630	160-200	92,00 €
	QL-F3528E60-Y-12							■ Yellow	585-595	160-200	
	QL-F3528E60-B-12							■ Blue	455-470	140-180	
	QL-F3528E60-G-12							■ Green	510-525	400-440	
	QL-F3528E60-P-12							□ Pure White	6000-7000K	620-660	
	QL-F3528E60-W-12							□ Warm White	3000-3500K	520-560	

Picture	Model No.	LED Qty	Work Voltage	Power	View Angle	Waterproof	Packing	Color	λ(Nm)/(CT:K)	Luminous Flux	Price/Re
											1-50
<b>Non-Waterproof Flexible LED Strips, DC12V, SMD 5050, 30LEDs/M</b>											
	QL-F5050A15-R-12	SMD 5050 30/m	DC12V	7.2w/m	120°	NO	5m/reel	Red	620-630	130-150	68,00 €
	QL-F5050A15-Y-12							Yellow	585-595	130-150	
	QL-F5050A15-B-12							Blue	455-470	110-130	
	QL-F5050A15-G-12							Green	510-525	230-250	
	QL-F5050A15-P-12							Pure White	6000-7000K	400-420	
	QL-F5050A15-W-12							Warm White	3000-3500K	310-330	
	QL-F5050A15-C-12							RGB	620-630 510-525 455-470	40-50 100-110 35-45	
<b>Waterproof Flexible LED Strips, DC12V, SMD 5050, 30LEDs/M, Single-Side Glued</b>											
	QL-F5050B15-R-12	SMD 5050 30/m	DC12V	7.2w/m	120°	IP65	5m/reel	Red	620-630	130-150	78,00 €
	QL-F5050B15-Y-12							Yellow	585-595	130-150	
	QL-F5050B15-B-12							Blue	455-470	110-130	
	QL-F5050B15-G-12							Green	510-525	230-250	
	QL-F5050B15-P-12							Pure White	6000-7000K	400-420	
	QL-F5050B15-W-12							Warm White	3000-3500K	310-330	
	QL-F5050B15-C-12							RGB	620-630 510-525 455-470	40-50 100-110 35-45	
<b>Waterproof Flexible LED Strips, DC12V, SMD 5050, 30LEDs/M, With Silicone Tube</b>											
	QL-F5050C15-R-12	SMD 5050 30/m	DC12V	7.2w/m	120°	IP67	5m/reel	Red	620-630	130-150	78,00 €
	QL-F5050C15-Y-12							Yellow	585-595	130-150	
	QL-F5050C15-B-12							Blue	455-470	110-130	
	QL-F5050C15-G-12							Green	510-525	230-250	
	QL-F5050C15-P-12							Pure White	6000-7000K	400-420	
	QL-F5050C15-W-12							Warm White	3000-3500K	310-330	
	QL-F5050C15-C-12							RGB	620-630 510-525 455-470	40-50 100-110 35-45	
<b>Waterproof Flexible LED Strips, DC12V, SMD 5050, 30LEDs/M, Tube+Glued</b>											
	QL-F5050E15-R-12	SMD 5050 30/m	DC12V	7.2w/m	120°	IP68	5m/reel	Red	620-630	130-150	80,00 €
	QL-F5050E15-Y-12							Yellow	585-595	130-150	
	QL-F5050E15-B-12							Blue	455-470	110-130	
	QL-F5050E15-G-12							Green	510-525	230-250	
	QL-F5050E15-P-12							Pure White	6000-7000K	400-420	
	QL-F5050E15-W-12							Warm White	3000-3500K	310-330	
	QL-F5050E15-C-12							RGB	620-630 510-525 455-470	40-50 100-110 35-45	

Picture	Model No.	LED Qty	Work Voltage	Power	View Angle	Waterproof	Packing	Color	$\lambda$ (Nm)/(CT:K)	Luminous Flux	Price/Re 1-50
<b>Non-Waterproof Flexible LED Strips, DC12V, SMD 5050, 60LEDs/M</b>											
	QL-F5050A30-R-12	SMD 5050 60/m	DC12V	14.4w/m	120°	NO	5m/reel	Red	620-630	260-300	114,00 €
	QL-F5050A30-Y-12							Yellow	585-595	260-300	
	QL-F5050A30-B-12							Blue	455-470	220-260	
	QL-F5050A30-G-12							Green	510-525	460-500	
	QL-F5050A30-P-12							Pure White	6000-7000K	850-900	
	QL-F5050A30-W-12							Warm White	3000-3500K	620-660	
	QL-F5050A30-C-12							RGB	620-630 510-525 455-470	80-100 200-220 70-90	
<b>Waterproof Flexible LED Strips, DC12V, SMD 5050, 60LEDs/M, Single-Side Glued</b>											
	QL-F5050B30-R-12	SMD 5050 60/m	DC12V	14.4w/m	120°	IP65	5m/reel	Red	620-630	260-300	124,00 €
	QL-F5050B30-Y-12							Yellow	585-595	260-300	
	QL-F5050B30-B-12							Blue	455-470	220-260	
	QL-F5050B30-G-12							Green	510-525	460-500	
	QL-F5050B30-P-12							Pure White	6000-7000K	800-840	
	QL-F5050B30-W-12							Warm White	3000-3500K	620-660	
	QL-F5050B30-C-12							RGB	620-630 510-525 455-470	80-100 200-220 70-90	
<b>Waterproof Flexible LED Strips, DC12V, SMD 5050, 60LEDs/M, With Silicone Tube</b>											
	QL-F5050C30-R-12	SMD 5050 60/m	DC12V	14.4w/m	120°	IP67	5m/reel	Red	620-630	260-300	124,00 €
	QL-F5050C30-Y-12							Yellow	585-595	260-300	
	QL-F5050C30-B-12							Blue	455-470	220-260	
	QL-F5050C30-G-12							Green	510-525	460-500	
	QL-F5050C30-P-12							Pure White	6000-7000K	800-840	
	QL-F5050C30-W-12							Warm White	3000-3500K	620-660	
	QL-F5050C30-C-12							RGB	620-630 510-525 455-470	80-100 200-220 70-90	
<b>Waterproof Flexible LED Strips, DC12V, SMD 5050, 60LEDs/M, Tube+Glued</b>											
	QL-F5050E30-R-12	SMD 5050 60/m	DC12V	14.4w/m	120°	IP68	5m/reel	Red	620-630	260-300	128,00 €
	QL-F5050E30-Y-12							Yellow	585-595	260-300	
	QL-F5050E30-B-12							Blue	455-470	220-260	
	QL-F5050E30-G-12							Green	510-525	460-500	
	QL-F5050E30-P-12							Pure White	6000-7000K	800-840	
	QL-F5050E30-W-12							Warm White	3000-3500K	620-660	
	QL-F5050E30-C-12							RGB	620-630 510-525 455-470	80-100 200-220 70-90	

Picture	Model No.	LED Qty	Work Voltage	Power	View Angle	Waterproof	Packing	Color	$\lambda$ (Nm)/(CT:K)	Luminous Flux	Price/Re 1-50
<b>Waterproof Dream Color Flexible LED Strips, DC5V, SMD5050, 32LEDs/M, With Silicone Tube</b>											
<b>Non-Waterproof Side-View Flexible LED Strips, DC12V, SMD335, 60LEDs/M</b>											
	QL-F335A30-R-12	SMD 335 60/m	DC12V	4.8w/m	120°	No	5m/reel	Red	620-630	260-300	66,00 €
	QL-F335A30-Y-12							Yellow	585-595	260-300	
	QL-F335A30-B-12							Blue	455-470	220-260	
	QL-F335A30-G-12							Green	510-525	460-500	
	QL-F335A30-P-12							Pure White	6000-7000K	800-840	
	QL-F335A30-W-12							Warm White	3000-3500K	620-660	
Picture	Model No.	LED Qty	Work Voltage	Power	View Angle	Waterproof	Packing	Color	$\lambda$ (Nm)/(CT:K)	Luminous Flux	Price/Re 1-50
<b>Waterproof Side-View Flexible LED Strips, DC12V, SMD335, 60LEDs/M, With Silicone Tube</b>											
	QL-F335C30-R-12	SMD 335 60/m	DC12V	4.8w/m	120°	IP67	5m/reel	Red	620-630	260-300	76,00 €
	QL-F335C30-Y-12							Yellow	585-595	260-300	
	QL-F335C30-B-12							Blue	455-470	220-260	
	QL-F335C30-G-12							Green	510-525	460-500	
	QL-F335C30-P-12							Pure White	6000-7000K	800-840	
	QL-F335C30-W-12							Warm White	3000-3500K	620-660	
<b>New Products: Non-Waterproof Flexible LED Strips, DC12V, Super Bright SMD 3528 (Chip Size: 10*23mil), 60LEDs/M</b>											
	QL-F3528A30S-W-12	SMD 3528 60/m Super Bright	DC12V	9.6w/m	120°	No	5m/reel	Warm White	3000-3500K	520-540lm	67,00 €
	QL-F3528A30S-P-12							Pure White	6000-7000K	700-720lm	
<b>New Products: Non-Waterproof Flexible LED Strips, DC12V, Super Bright SMD 3528 (Chip Size: 10*23mil), 78LEDs/M</b>											
	QL-F3528A39S-W-12	SMD 3528 78/m Super Bright	DC12V	12.5w/m	120°	No	5m/reel	Warm White	3000-3500K	680-700lm	81,00 €
	QL-F3528A39S-P-12							Pure White	6000-7000K	915-935lm	
<b>New Products: Non-Waterproof Flexible LED Strips, DC12V, Super Bright SMD 3528 (Chip Size: 10*23mil), 120LEDs/M</b>											
	QL-F3528A60S-W-12	SMD 3528 120/m Super Bright	DC12V	19.2w/m	120°	No	5m/reel	Warm White	3000-3500K	1040-1080lm	118,00 €
	QL-F3528A60S-P-12							Pure White	6000-7000K	1400-1440lm	





Picture	Model No.	LED Qty	Work Voltage	Power	View Angle	Waterproof	Color	λ(Nm)/(CT:K)	Luminous Flux	Price/pcs
										1-250
	QL-P3528A30F-R-12	SMD 3528 30/0.5m	DC12V	2.4W/pcs	120°	NO	■ Red	620-630	40-50	4,20 €
	QL-P3528A30F-Y-12						■ Yellow	585-595	40-50	
	QL-P3528A30F-B-12						■ Blue	455-470	35-45	
	QL-P3528A30F-G-12						■ Green	510-525	100-110	
	QL-P3528A30F-P-12						□ Pure White	6000-7000K	155-165	
	QL-P3528A30F-W-12						□ Warm White	3000-3500K	130-140	
Non-Waterproof LED Light Bar, DC12V, SMD 5050, 30LEDs/pcs, Fibre PCB										
	QL-P5050A30F-R-12	SMD 5050 30/0.50m	DC12V	7.2W/pcs	120°	NO	■ Red	620-630	130-150	12,40 €
	QL-P5050A30F-Y-12						■ Yellow	585-595	130-150	
	QL-P5050A30F-B-12						■ Blue	455-470	110-130	
	QL-P5050A30F-G-12						■ Green	510-525	230-250	
	QL-P5050A30F-P-12						□ Pure White	6000-7000K	400-420	
	QL-P5050A30F-W-12						□ Warm White	3000-3500K	310-330	
	QL-P5050A30F-C-12	SMD 5050 30/0.57m	■ ■ ■ RGB	620-630 510-525 455-470	40-50 100-110 35-45					
Non-Waterproof LED Light Bar with aluminum crust, DC12V, SMD 5050, 30LEDs/0.5m, Aluminum Crust + Fibre PCB										
	QL-P5050S30F-R-12	SMD 5050 30/0.5m	DC12V	7.2W/pcs	120°	No	■ Red	620-630	130-150	16,40 €
	QL-P5050S30F-Y-12						■ Yellow	585-595	130-150	
	QL-P5050S30F-B-12						■ Blue	455-470	110-130	
	QL-P5050S30F-G-12						■ Green	510-525	230-250	
	QL-P5050S30F-P-12						□ Pure White	6000-7000K	400-420	
	QL-P5050S30F-W-12						□ Warm White	3000-3500K	310-330	
	QL-P5050S30F-C-12	■ ■ ■ RGB	620-630 510-525 455-470	40-50 100-110 35-45						

Picture	Model No.	LED Qty	Work Voltage	Power	View Angle	Waterproof	Color	λ(Nm)/(CT:K)	Luminous Flux	Price/pcs
										1-250
<b>LED Light Bar with aluminum crust, DC12V, SMD 5050, 30LEDs/0.5m, Aluminum Crust + Fibre PCB</b>										
	QL-P5050D30F-R-12	SMD 5050 30/0.5m	DC12V	7.2W/pcs	120°	IP54	■ Red	620-630	130-150	17,20 €
	QL-P5050D30F-Y-12						■ Yellow	585-595	130-150	
	QL-P5050D30F-B-12						■ Blue	455-470	110-130	
	QL-P5050D30F-G-12						■ Green	510-525	230-250	
	QL-P5050D30F-P-12						□ Pure White	6000-7000K	400-420	
	QL-P5050D30F-W-12						□ Warm White	3000-3500K	310-330	
	QL-P5050D30F-C-12						■ ■ ■ RGB	620-630 510-525 455-470	40-50 100-110 35-45	
Picture	Model No.	LED Qty	Work Voltage	Power	View Angle	Waterproof	Color	λ(Nm)/(CT:K)	Luminous Flux	Price/pcs
<b>Superflux LED Light Bar, DC12V, 60LEDs/m, Aluminum Crust+Fibre PCB</b>										
	QL-FSPA30-R-12	60/m(pcs)	DC12V	4.8W/m	120°	IP67	■ Red	620-630	100-120	18,00 €
	QL-FSPA30-Y-12						■ Yellow	585-595	100-120	
	QL-FSPA30-B-12						■ Blue	455-470	80-100	
	QL-FSPA30-G-12						■ Green	510-525	220-240	
	QL-FSPA30-P-12						□ Pure White	6000-7000K	310-330	
	QL-FSPA30-W-12						□ Warm White	3000-3500K	260-280	



Monaco Video Media

10, bd Princesse Charlotte  
 Monaco  
 Principauté de Monaco  
 www.mvm.mc  
 tel. 00377 9797 5252  
 fax 00377 9797 5253






	model No.	working voltage	power consumption (Watts)		beam angle	Prix FOB Monaco	
	<b>NGY-90</b> Ø 92*275mm ; E40	AC85-265V	LED output:28w; total power:32w	28	120/140 selecatable	260,00 €	2500lm
	<b>NGY-LS2P56W</b>	AC85-265V	LED output:56w; total power:66w	56	adjustable°	680,00 €	LED original luminous lux 5300Lm(Tj=25 ) LED working luminous lux 4700Lm(Tj=70 Ta=25 ) Light luminous lux 4230Lm(Tj=70 Ta=25 )
	<b>NGY-LS4P112W</b>	AC85-265V	LED output:112w; total power:132w	112		918,00 €	LED original luminous lux 10600Lm(Tj=25 degree) LED working luminous lux 9500Lm(Tj=70 Ta=25degree ) Light luminous lux 8550Lm(Tj=70 Ta=25degree? )
	<b>NGY-LS6P168W</b>	AC85-265V	LED output:168w; total power:198w	168		1 378,80 €	LED original luminous lux 15000Lm(Tj=25degree ) LED working luminous lux 13800Lm(Tj=70 degree, Ta=25degree ) Light luminous lux 12400Lm(Tj=70 degree Ta=25degree )





## LED TUNNEL LIGHTING


	model No.	working voltage	power consumption (Watts)		beam angle	LUM.output	Price
	NGY-115FL10WB	85-260	10W	1	100degree	600lm	63,53 €
						800lm	92,28 €
	NGY-225FL20WB	85-260	20W	1	100degree	1200lm	147,86 €
	NGY-225FL30WB	85-260	30W	1	100degree	1600lm	181,22 €
						1800lm	157,39 €
2400lm	206,63 €						
	NGY-225FL20WS	85-260	20W	1	50degree	1200lm	147,86 €
	NGY-225FL30WS	85-260	30W	1	50degree	1600lm	181,22 €
						1800lm	157,39 €
2400lm	206,63 €						
	NGY-290FL40WB	85-260	40W	1	100degree	2400lm	204,88 €
	NGY-290FL50WB	85-260	50W	1	100degree	3200lm	238,39 €
						3000lm	225,53 €
4000lm	265,39 €						
	NGY-290FL40WS	85-260	40W	1	50degree	2400lm	204,88 €
	NGY-290FL50WS	85-260	50W	1	50degree	3200lm	238,39 €
						3000lm	225,53 €
4000lm	265,39 €						
	NGY-360FL60WB	85-260	60W	1	100degree	3600lm	344,81 €
	NGY-360FL70WB	85-260	70W	1	100degree	4800lm	386,10 €
						4200lm	371,81 €
5600lm	413,10 €						
NGY-360FL80WB	85-260	80W	1	100degree	4800lm	397,22 €	
					6400lm	444,86 €	
	NGY-593FL100WB	85-260	100W	2	100degree	6000lm	605,91 €
	NGY-593FL120WB	85-260	120W	2	100degree	8000lm	653,40 €
						7200lm	629,74 €
9600lm	677,22 €						
NGY-593FL150WB	85-260	150W	2	100degree	9000lm	701,05 €	
					12000lm	748,54 €	
	NGY-360FL60RGB	85-260	60W	3	100degree	LOW	430,06 €
						HIGH	472,82 €

Product Picture	Model No.	Light Source	Power	Color	BASE	Input Voltage	Output Lumen	Unit Price
								1-500
	QL-B05P-E32-D	Edison	3*2W		E27	AC110-130V AC220-240V	280-320lm	38,60 €
	QL-B05W-E32-D			Warm White			220-240lm	
	QL-B05P-E51-D	Edison	5*1W	Pure White	E27	AC110-130V AC220-240V	350-400lm	38,60 €
	QL-B05W-E51-D			Warm White			300-350lm	
	QL-B02P-E31-D	Edison	3*1W	Pure White	E27	AC110-130V AC220-240V	210-250lm	25,24 €
	QL-B02W-E31-D			Warm White			170-210lm	
	QL-B03P-E31-D	Edison	3*1W	Pure White	E27	AC110-130V AC220-240V	210-250lm	25,24 €
	QL-B03W-E31-D			Warm White			170-210lm	
	QL-B04P-E31-D	Edison	3*1W	Pure White	E27	AC110-130V AC220-240V	210-250lm	25,24 €
	QL-B04W-E31-D			Warm White			170-210lm	

Product Picture	Model No.	Light Source	Power	Color	BASE	Input Voltage	Output Lumen	Unit Price
								1-500
	QL-S09GU10P-E31-D	Edison	3*1W		GU10	AC110-130V AC220-240V	240-270lm	22,20 €
	QL-S09GU10W-E31-D			Warm White			180-210lm	
	QL-S09E27P-E31-D	Edison	3*1W	Pure White	E27	AC110-130V AC220-240V	240-270lm	22,20 €
	QL-S09E27W-E31-D			Warm White			180-210lm	
	QL-S04GU10P-E31-D	Edison	3*1W	Pure White	GU10	AC110-130V AC220-240V	240-270lm	26,38 €
	QL-S04GU10W-E31-D			Warm White			180-210lm	
	QL-S03E27P-E31-D	Edison	3*1W	Pure White	E27	AC110-130V AC220-240V	240-270lm	26,00 €
	QL-S03E27W-E31-D			Warm White			180-210lm	
	QL-S10GU10P-E32-D	Edison	3*2W	Pure White	GU10	AC110-130V AC220-240V	300-330lm	35,20 €
	QL-S10GU10W-E32-D			Warm White			240-270lm	
	QL-S10E27P-E32-D	Edison	3*2W	Pure White	E27	AC110-130V AC220-240V	300-330lm	35,20 €
	QL-S10E27W-E32-D			Warm White			240-270lm	

Product Picture	Model No.	Light Source	Power	Color	Base	Input Voltage	Out Lumen	Unit
								1-500
	QL-P20P-E51-D	Edison	5*1W	Pure White	E27	AC100V-240V	400-450lm	37,80 €
	QL-P20P-E51-D			Warm White			300-350lm	
	QL-P30P-E71-D	Edison	7*1W	Pure White	E27	AC100V-240V	560-630lm	52,20 €
	QL-P30P-E71-D			Warm White			420-490lm	
	QL-P38P-E121-D	Edison	12*1W	Pure White	E27	AC100V-240V	960-1080lm	78,00 €
	QL-P38P-E121-D			Warm White			720-840lm	

Code	Name	Colors	Description	Voltage	Price FOB Monaco
TG1	D50mm, 3w LED down light	White	Dimension: 50mm, beam angle: 30°, 100LM, 3W, constant voltage input, 1X3W	DC12-24V	12,26 €
		Warm white	Dimension: 50mm, beam angle: 30°, 90LM, 3W, constant voltage input, 1X3W	DC12-24V	
		White	Dimension: 50mm, beam angle: 30°, 100LM, 3W, constant current input, 1X3W	specialized 3W constant current power supply, input DC12-24V,	12,48 €
		Warm white	Dimension: 50mm, beam angle: 30°, 90LM, 3W, constant current input, 1X3W	specialized power supply, 3W constant current power supply, input DC12-24V,	
		White	Dimension: 50mm, beam angle: 30°, 100LM, 3W, wide voltage, 1X3W	AC86-240V	14,58 €
		Warm white	Dimension: 50mm, beam angle: 30°, 90LM, 3W, wide voltage, 1X3W	AC86-240V	
TG2	D67mm, 3w LED down light	White	Dimension: 67mm, beam angle: 30°, 100LM, 3W, constant voltage input, 1X3W	DC12-24V	16,22 €
		Warm white	Dimension: 67mm, beam angle: 30°, 90LM, 3W, constant voltage input, 1X3W	DC12-24V	
		White	Dimension: 67mm, beam angle: 30°, 100LM, 3W, constant current input, 1X3W	specialized 3W constant current power supply, input DC12-24V,	16,50 €
		Warm white	Dimension: 67mm, beam angle: 30°, 90LM, 3W, constant current input, 1X3W	specialized 3W constant current power supply, input DC12-24V,	
		White	Dimension: 67mm, beam angle: 30°, 100LM, 3W, wide voltage, 1X3W	<b>Every pcs SMD have reach 7.3 lumens, totally about 2200 lumens(white)</b>	18,58 €
		Warm white	Dimension: 67mm, beam angle: 30°, 90LM, 3W, wide voltage, 1X3W	AC86-240V	
TG3	D62mm, 3w LED down light	White	Dimension: 62mm, beam angle: 30°, 210LM, 3W, constant voltage input, 3X1W	DC12-24V	14,40 €
		Warm white	Dimension: 62mm, beam angle: 30°, 200LM, 3W, constant voltage input, 3X1W	DC12-24V	
		White	Dimension: 62mm, beam angle: 30°, 210LM, 3W, constant current input, 3X1W	specialized 3W constant current power supply, input DC12-24V,	14,76 €
		Warm white	Dimension: 62mm, beam angle: 30°, 200LM, 3W, constant current input, 3X1W	specialized 3W constant current power supply, input DC12-24V,	
		White	Dimension: 62mm, beam angle: 30°, 210LM, 3W, wide voltage, 3X1W	AC86-240V	15,70 €
		Warm white	Dimension: 62mm, beam angle: 30°, 200LM, 3W, wide voltage, 3X1W	AC86-240V	
FB1	Square 3w LED down light	White	Dimension: 70mm, beam angle: 30°/60°, 210LM, 3W, constant voltage input, 3X1W	DC12-24V	23,08 €
		Warm white	Dimension: 70mm, beam angle: 30°/60°, 200LM, 3W, constant voltage input, 3X1W	DC12-24V	
		White	Dimension: 70mm, beam angle: 30°/60°, 210LM, 3W, constant current input, 3X1W	specialized 3W constant current power supply, input DC12-24V,	18,46 €
		Warm white	Dimension: 70mm, beam angle: 30°/60°, 200LM, 3W, constant current input, 3X1W	specialized 3W constant current power supply, input DC12-24V,	
		White	Dimension: 70mm, beam angle: 30°/60°, 210LM, 3W, wide voltage, 3X1W	AC86-240V	19,52 €
		Warm white	Dimension: 70mm, beam angle: 30°/60°, 200LM, 3W, wide voltage, 3X1W	AC86-240V	






Monaco Video Media

10, bd Princesse Charlotte  
Monaco  
Principauté de Monaco  
www.mvm.mc  
tel. 00377 9797 5252  
fax 00377 9797 5253

Code	Name	Colors	Description	Voltage	Price FOB Monaco
FB2	D90mm, 5w LED down light	White	Dimension: 90mm, beam angle: 30°/60°, 350LM, 5W, constant current input, 5X1W	DC12-24V	22,96 €
		Warm white	Dimension: 90mm, beam angle: 30°/60°, 335LM, 5W, constant current input, 5X1W	DC12-24V	
		White	Dimension: 90mm, beam angle: 30°/60°, 350LM, 5W, wide voltage, 5X1W	AC86-240V	24,18 €
		Warm white	Dimension: 90mm, beam angle: 30°/60°, 335LM, 5W, wide voltage, 5X1W	AC86-240V	
FB3	D80mm, 7w LED down light	White	Dimension: 80mm, flood light, 420LM, 7W, constant current input, 21X0.3W	specialized 7W constant current power supply, input DC12-24V,	32,96 €
		Warm white	Dimension: 80mm, flood light, 400LM, 7W, constant current input, 21X0.3W	specialized 7W constant current power supply, input DC12-24V,	
		White	Dimension: 80mm, flood light, 420LM, 7W, wide voltage, 21X0.3W	AC86-240V	33,24 €
		Warm white	Dimension: 80mm, flood light, 400LM, 7W, wide voltage, 21X0.3W	AC86-240V	
FB4	D80mm, 7w LED down light	White	Dimension: 80mm, beam angle: 30°/60°, 420LM, 7W, constant voltage input, 7X1W	DC12-24V	31,12 €
		Warm white	Dimension: 80mm, beam angle: 30°/60°, 400LM, 7W, constant voltage input, 7X1W	DC12-24V	
		White	Dimension: 80mm, beam angle: 30°/60°, 420LM, 7W, wide voltage, 7X1W	AC86-240V	31,40 €
		Warm white	Dimension: 80mm, beam angle: 30°/60°, 400LM, 7W, wide voltage, 7X1W	AC86-240V	
SD1	6w LED down light with bracket	White	Beam angle: 30°/60°, 420LM, 6W, constant current input, 6X1W	specialized 6W constant current power supply, input DC12-24V,	43,32 €
		Warm white	Beam angle: 30°/60°, 400LM, 6W, constant current input, 6X1W	specialized 6W constant current power supply, input DC12-24V,	
		White	Beam angle: 30°/60°, 420LM, 6W, constant voltage input, 6X1W	DC12V-24V	43,70 €
		Warm white	Beam angle: 30°/60°, 400LM, 6W, constant voltage input, 6X1W	DC12V-24V	
		White	Beam angle: 30°/60°, 420LM, 6W, wide voltage, 6X1W	AC86-240V	45,10 €
		Warm white	Beam angle: 30°/60°, 400LM, 6W, wide voltage, 6X1W	AC86-240V	
SD2	D110mm, 9w LED down light	White	Beam angle: 30°/60°, 630LM, 9W, constant voltage input, 9X1W	DC12V-24V	40,24 €
		Warm white	Beam angle: 30°/60°, 600LM, 9W, constant voltage input, 9X1W	DC12V-24V	
		White	Beam angle: 30°/60°, 630LM, 9W, constant current input, 9X1W	specialized 9W constant current power supply, input DC12-24V,	40,58 €
		Warm white	Beam angle: 30°/60°, 600LM, 9W, constant current input, 9X1W	specialized 9W constant current power supply, input DC12-24V,	
		White	Beam angle: 30°/60°, 630LM, 9W, wide voltage, 9X1W	AC86-240V	41,74 €
		Warm white	Beam angle: 30°/60°, 600LM, 9W, wide voltage, 9X1W	AC86-240V	



Code	Name	Colors	Description	Voltage	Price FOB Monaco
SD3	D110mm, 12w LED down light	White	Beam angle: 30°/60°, 840LM, 12W, constant voltage input, 12X1W	DC12V-24V	41,64 €
		Warm white	Beam angle: 30°/60°, 800LM, 12W, constant voltage input, 12X1W	DC12V-24V	
		White	Beam angle: 30°/60°, 840LM, 12W, constant current input, 12X1W	specialized 12W constant current power supply, input DC12-24V,	42,20 €
		Warm white	Beam angle: 30°/60°, 800LM, 12W, constant current input, 12X1W	specialized 12W constant current power supply, input DC12-24V,	
		White	Beam angle: 30°/60°, 840LM, 12W, wide voltage, 12X1W	AC86-240V	44,06 €
		Warm white	Beam angle: 30°/60°, 800LM, 12W, wide voltage, 12X1W	AC86-240V	
HPRB1	D95mm, 6w LED down light	White	Beam angle: 30°/60°, 420LM, 6W, constant current input, 6X1W	specialized power supply, 6W constant current power supply, input DC12-24V,	24,68 €
		Warm white	Beam angle: 30°/60°, 400LM, 6W, constant current input, 6X1W	specialized power supply, 6W constant current power supply, input DC12-24V,	
		White	Beam angle: 30°/60°, 420LM, 6W, constant voltage input, 6X1W	DC12V-24V	25,02 €
		Warm white	Beam angle: 30°/60°, 400LM, 6W, constant voltage input, 6X1W	DC12V-24V	
		White	Beam angle: 30°/60°, 420LM, 6W, wide voltage, 6X1W	AC86-240V	26,42 €
		Warm white	Beam angle: 30°/60°, 400LM, 6W, wide voltage, 6X1W	AC86-240V	
HPRB2	D95mm, 7w LED down light	White	Beam angle: 30°/60°, 490LM, 7W, constant voltage input, 7X1W	DC12-24V	27,50 €
		Warm white	Beam angle: 30°/60°, 470LM, 7W, constant voltage input, 7X1W	DC12-24V	
		White	Beam angle: 30°/60°, 490LM, 7W, constant voltage input, 7X1W	AC86-240V	27,80 €
		Warm white	Beam angle: 30°/60°, 470LM, 7W, constant voltage input, 7X1W	AC86-240V	
TH1	3X1W integrated style	White	Beam angle: 30°/60°, 210LM, 3W, constant current input, 3X1W	specialized power supply, 3W constant current power supply, input DC12-24V,	22,12 €
		Warm white	Beam angle: 30°/60°, 200LM, 3W, constant current input, 3X1W	specialized power supply, 3W constant current power supply, input DC12-24V,	
		White	Beam angle: 30°/60°, 210LM, 3W, wide voltage, 3X1W	AC86-240V	23,44 €
		Warm white	Beam angle: 30°/60°, 200LM, 3W, wide voltage, 3X1W	AC86-240V	





Monaco Video Media

10, bd Princesse Charlotte  
 Monaco  
 Principauté de Monaco  
 www.mvm.mc  
 tel. 00377 9797 5252  
 fax 00377 9797 5253

Code	Name	Colors	Description	Voltage	Price FOB Monaco
TH2	6X1W integrated style	White	Beam angle: 30°/60°, 420LM, 6W, constant current input, 6X1W	specialized power supply, 6W constant current power supply, input DC12-24V,	27,02 €
		Warm white	Beam angle: 30°/60°, 400LM, 6W, constant current input, 6X1W	specialized power supply, 6W constant current power supply, input DC12-24V,	
		White	Beam angle: 30°/60°, 420LM, 6W, constant voltage input, 6X1W	DC12-24V	27,44 €
		Warm white	Beam angle: 30°/60°, 400LM, 6W, constant voltage input, 6X1W	DC12-24V	
		White	Beam angle: 30°/60°, 420LM, 6W, wide voltage, 6X1W	AC86-240V	28,84 €
		Warm white	Beam angle: 30°/60°, 400LM, 6W, wide voltage, 6X1W	AC86-240V	
TH3	15W LED down light with bracket	White	Beam angle: 30°/60°, 1050LM, 15W, constant current input, 15X1W	specialized power supply, 15W constant current power supply, input DC12-24V,	71,96 €
		Warm white	Beam angle: 30°/60°, 1000LM, 15W, constant current input, 15X1W	specialized power supply, 15W constant current power supply, input DC12-24V,	
		White	Beam angle: 30°/60°, 1050LM, 15W, constant voltage input, 15X1W	DC12V-24V	72,44 €
		Warm white	Beam angle: 30°/60°, 1000LM, 15W, constant voltage input, 15X1W	DC12V-24V	
		White	Beam angle: 30°/60°, 1050LM, 15W, wide voltage, 15X1W	AC86-240V	71,28 €
		Warm white	Beam angle: 30°/60°, 1000LM, 15W, wide voltage, 15X1W	AC86-240V	





Monaco Video Media






10, bd Princesse Charlotte  
 Monaco  
 Principauté de Monaco  
 www.mvm.mc  
 tel. 00377 9797 5252  
 fax 00377 9797 5253





Code	Name	Colors	Description	Voltage	Price FOB Monaco
LD1	3W LED track light	White	Beam angle: 30°/60°, 210LM, 3W, wide voltage, 3X1W	AC86-AC240V	13,28 €
		Warm white	Beam angle: 30°/60°, 200LM, 3W, wide voltage, 3X1W	AC86-AC240V	
LD2	5W LED track light	White	Beam angle: 30°/60°, 350LM, 5W, wide voltage, 5X1W	AC86-AC240V	36,34 €
		Warm white	Beam angle: 30°/60°, 335LM, 5W, wide voltage, 5X1W	AC86-AC240V	
LD3	6W LED track light	White	Beam angle: 30°/60°, 420LM, 6W, wide voltage, 6X1W	AC86-AC240V	37,74 €
		Warm white	Beam angle: 30°/60°, 400LM, 6W, wide voltage, 6X1W	AC86-AC240V	
LD4	12W LED track light	White	Beam angle: 30°/60°, 840LM, 12W, wide voltage, 12X1W	AC86-AC240V	50,32 €
		Warm white	Beam angle: 30°/60°, 800LM, 12W, wide voltage, 12X1W	AC86-AC240V	
LD5	7W LED track light	White	Beam angle: 30°/60°, 490LM, 7W, wide voltage, 7X1W	AC86-AC240V	40,06 €
		Warm white	Beam angle: 30°/60°, 470LM, 7W, wide voltage, 7X1W	AC86-AC240V	
LD6	5W LED track light	White	Beam angle: 30°/60°, 350LM, 5W, wide voltage, 5X1W	AC86-AC240V	38,66 €
		Warm white	Beam angle: 30°/60°, 335LM, 5W, wide voltage, 5X1W	AC86-AC240V	
LD7	9W LED track light	White	Beam angle: 30°/60°, 630LM, 9W, wide voltage, 9X1W	AC86-AC240V	46,60 €
		Warm white	Beam angle: 30°/60°, 600LM, 9W, wide voltage, 9X1W	AC86-AC240V	
LD8	7W LED track light	White	Beam angle: 30°/60°, 490LM, 7W, wide voltage, 7X1W	AC86-AC240V	41,92 €
		Warm white	Beam angle: 30°/60°, 470LM, 7W, wide voltage, 7X1W	AC86-AC240V	










Photo	Model	Size	Power	Color	Price	Voltage
	NGY-UL140-3W	φ 140MM, Stainless steel	3 Watts	Red/Yellow	53,48 €	24V/12V
				Blue	56,30 €	
				Green	59,81 €	
				White	59,81 €	
				Warm White	63,33 €	
				Seven Color	61,57 €	
	NGY-UL160-6W	φ 160MM, Stainless steel	6 Watts	Red/Yellow	58,41 €	24V/12V
				Blue	66,85 €	
				Green	70,37 €	
				White	70,37 €	
				Warm White	73,89 €	
				Seven Color	72,13 €	
	NGY-UL150-6W	φ 150MM, Stainless steel	6 Watts	Red/Yellow	72,48 €	24V/12V
				Blue	80,93 €	
				Green	84,44 €	
				White	84,44 €	
				Warm White	87,96 €	
				Seven Color	86,20 €	
	NGY-UL90-3W	φ 90MM, Stainless steel	3 Watts	Red/Yellow	57,00 €	24V/12V
				Blue	66,85 €	
				Green	70,37 €	
				White	70,37 €	
				Warm White	73,89 €	
				Seven Color	72,13 €	
	NGY-UL160-9W	φ 160MM, Stainless steel	9 Watts	Red/Yellow	68,26 €	24V/12V
				Blue	77,41 €	
				Green	80,93 €	
				White	80,93 €	
				Warm White	84,44 €	
				Seven Color	82,69 €	
	NGY-UL170-10W	φ 170MM, Stainless steel	10 Watts	Red/Yellow	74,24 €	24V/12V
				Blue	83,74 €	
				Green	87,26 €	
				White	87,26 €	
				Warm White	90,78 €	
				Seven Color	88,67 €	
	NGY-UL170-12W	φ 170MM, Stainless steel	12 Watts	Red/Yellow	84,44 €	24V/12V
				Blue	94,30 €	
				Green	97,81 €	
				White	97,81 €	
				Warm White	101,33 €	
				Seven Color	99,57 €	







Picture	Products Name	Model No.	Description	Unit Price/pcs
				1-100
	RF Audio Controller	QL-CTL-A	Working temperature: -20-60 °C Supply voltage: DC5V/DC12V/DC18V/DC24V Connecting mode: common anode Output: 3 channels Rated output current: 4A(each channel) The largest output current: 6A(each channel) Size:130*64*24mm Gross weight:220g	
	Rain-proof RF Controller	QL-CTL-B	Working temperature: -20-60 °C Supply voltage: DC5V/DC6V/DC12V/DC24V Connecting mode: common anode / common cathode Output: 3 channels Rated output current:4A (each channel) The largest output current: 6A (each channel) Size:96*66*26mm Gross weight:210g	30,00 €
	RF Controller	QL-CTL-C	Working temperature: -20-60 °C Supply voltage: DC5V/DC6V/DC12V/DC24V Connecting mode: common anode / common cathode Output: 3 channels Rated output current:4A (each channel) The largest output current: 6A (each channel) Size:128*64*24mm Gross weight:220g	28,00 €
	RF Controller	QL-CTL-D	Working temperature: -20-60 °C Supply voltage: DC5V/DC6V/DC12V/DC24V Connecting mode: common anode / common cathode Output: 3 channels Rated output current:4A (each channel) The largest output current: 6A(each channel) Size:90*70*28mm Gross weight:200g	28,00 €
	RF Controller	QL-CTL-E	Working temperature: -20-60 °C Supply voltage: DC5V/DC6V/DC12V/DC24V Connecting mode: common anode / common cathode Output: 3 channels Rated output current:4A (each channel) The largest output current: 6A (each channel) Size: 162*138*47mm Gross weight:290g	33,00 €
	6-Key Infrared Controller	QL-CTL-F	Working temperature: -20-60 °C Supply voltage: DC5V/DC6V/DC12V/DC24V Connecting mode: common anode / common cathode Output: 3 channels Rated output current:4A (each channel) The largest output current: 6A (each channel) The brightness and speed is adjustable Size:90*70*28mm Gross weight:175g	23,00 €
	24-Key Infrared Controller	QL-CTLIR-A	Working temperature: -20-60 °C Supply voltage: DC12V/DC24V Connecting mode: common anode / common cathode Output: 3 channels Rated output current:2A (each channel) The largest output current: 4A (each channel) The brightness and speed is adjustable Size:83*35*22mm Gross weight:80g	10,80 €
	RF Dream-Color Controller	QL-CTL-G	Working temperature: -20-60 °C Supply voltage: DC12V Power Rating: 2.2W Output: two group SPI signal Size: 90*60*25mm Gross weight:235g Function: it has 128 grayscale, length setup function and power-fail memory function, you may choose it freely from a lot of programs.	46,00 €
	DMX Dream-Color Controller	QL-CTL-H	Working temperature: -20-60 °C Supply voltage: DC5V Output: SPI signal Strip length controlled: 5M Size:72*38*28mm Gross weight:130g	41,00 €
	DMX RGB Controller	QL-CTL-I	Working temperature: -20-60 °C Supply voltage: 12V ~ 24VDC Output: 3 channels Connecting mode: common anode Output current: 4A Output power: 12V<144W, 24V<288W Size: 165*68*40mm Gross weight:355g	38,00 €
	Wireless DMX Controller	QL-CTL-J	Working temperature: -20-60 °C Received signal: Radio wave + DMX Power Supply: DC5V /DC6V/DC12V/DC24V Connecting mode: common anode / common cathode Output: 3 channels Rated output current:4A (each channel) The largest output current: 6A (each channel) Size:85*77*26mm Gross weight:355g	46,00 €
	Color-Temperature Controller	QL-CTLT-A	Color Temperature Controller Working Temperature: -20-40 degree Working Voltage: DC 12V Connection: Common Anode Output: 2-loops Static Power consumption: <1W Output current: <4A (per loop) Control mode: Remote control	31,00 €
	Color-Temperature Amplifier	QL-AMPT-B	Color Temperature Amplifier Working Temperature: -20-40 degree Working Voltage: DC 12V Connection: Common Anode Output: 2-loops Static Power consumption: <1W Output current: <4A (per loop)	18,00 €
	RGB Amplifier	QL-AMP-A	Input: R/G/B/+ Out put common anode: R/G/B Output current: 4A (each channel) Supply voltage: DC5V/DC6V/DC12V/DC24V Size: 105*66*25mm Gross weight: 150g	18,00 €
	RGB Amplifier	QL-AMP-B	Input: R/G/B/+ Out put: common anode Output current: 4A (each channel) Supply voltage: DC5V/DC6V/DC12V/DC24V Size: 114*66*25mm Gross weight: 135g	17,00 €
	Dimmer With Remote Controller	QL-DIM-D	Work temperature: -20-60 °C Supply voltage: DC5V/DC6V/DC12V/DC24V Size: 89*59*35mm Gross weight:120g Output current: 8A, Brightness: from 0% to 100% With Remote Controller	13,80 €
	Dimmer	QL-DIM-A	Work temperature: -20-60 °C Supply voltage: DC5V/DC6V/DC12V/DC24V Size: 89*59*35mm Gross weight:120g Output current: 8A, Brightness: from 0% to 100%	8,80 €
	Dimmer	QL-DIM-B	Work temperature: -20-60 °C Supply voltage: DC5V/DC6V/DC12V/DC24V Size: 61*33*32mm Gross weight:65g	7,00 €

Product Picture	Model No.	Power	LED Qty	Input Voltage	Waterproof	Lens Angle	Materials	Dimension (mm)	Color	Unit Price/PCS
										1-50
LED (Light Emitting Diode) est un composant										
	QL-LFA1W36-S	36*1W	36 LEDs	AC 220V /110V	IP 65	15°/30°/45°	Aluminum	L442xW206xH186	Single Color	296,27 €
	QL-LFA1W36-RGB							L337xW206xH186	RGB	331,34 €
	QL-LFA3W36-S	36*3W	36 LEDs	AC 220V /110V	IP 65	15°/30°/45°	Aluminum	L442xW206xH186	Single Color	382,50 €
	QL-LFA3W36-RGB							L442xW206xH186	RGB	417,58 €
	QL-LFA1W72-S	72*1W	72 LEDs	AC 220V /110V	IP 65	15°/30°/45°	Aluminum	L795xW206xH186	Single Color	509,59 €
	QL-LFA1W72-RGB							L592xW206xH186	RGB	544,67 €
	QL-LFA3W72-S	72*3W	72 LEDs	AC 220V /110V	IP 65	15°/30°/45°	Aluminum	L795xW206xH186	Single Color	677,95 €
	QL-LFA3W72-RGB							L795xW206xH186	RGB	713,02 €
	QL-LFD1W18-S	18*1W	18 LEDs	AC 220V /110V	IP 65	15°/30°/45°	Aluminum	Φ205xH270	Single Color	210,44 €
	QL-LFD1W18-RGB							Φ205xH270	RGB	213,33 €
	QL-LFD3W18-S	18*3W	18 LEDs	AC 220V /110V	IP 65	15°/30°/45°	Aluminum	Φ205xH270	Single Color	268,21 €
	QL-LFD3W18-RGB							Φ205xH270	RGB	231,48 €

Product Picture	Model No.	Power	LED Qty	Input Voltage	Waterproof	Lens Angle	Materials	Dimension (mm)	Color	Unit
										1-50
<b>LED Flooding Light, DMX512/1990</b>										
	QL-LFE1W9-S	9*1W	9 LEDs	AC 220V /110V	IP 65	15°/30°/45°	Aluminum	Φ170×H253	Single Color	160,92 €
	QL-LFE1W9-RGB							Φ170×H253	RGB	170,21 €
	QL-LFE3W9-S	9*3W	9 LEDs	AC 220V /110V	IP 65	15°/30°/45°	Aluminum	Φ170×H253	Single Color	165,05 €
	QL-LFE3W9-RGB							Φ170×H253	RGB	181,56 €
	QL-LFE1W12-S	12*1W	12 LEDs	AC 220V /110V	IP 65	15°/30°/45°	Aluminum	Φ170×H253	Single Color	165,05 €
	QL-LFE1W12-RGB							Φ170×H253	RGB	181,56 €
<b>LED Wall Washer, DMX512/1990</b>										
	QL-WC1W9-S	9*1W	9 LEDs	DC 12V	IP 65	15°/30°/45°	Aluminum	L300×W55×H100	Single Color	84,59 €
	QL-WC1W9-RGB								RGB	119,66 €
	QL-WC1W18-S	18*1W	18 LEDs	DC 24V	IP 65	15°/30°/45°	Aluminum	L610×W55×H100	Single Color	117,60 €
	QL-WC1W18-RGB								RGB	152,67 €
	QL-WC1W36-S	36*1W	36 LEDs	DC 24V	IP 65	15°/30°/45°	Aluminum	L1210×W55×H100	Single Color	200,12 €
	QL-WC1W36-RGB								RGB	235,20 €
	QL-WB3W9-S	9*3W	9 LEDs	DC 12V	IP 65	15°/30°/45°	Aluminum	L310×W60×H134	Single Color	138,23 €
	QL-WB3W9-RGB								RGB	173,30 €
	QL-WB3W18-S	18*3W	18 LEDs	DC 24V	IP 65	15°/30°/45°	Aluminum	L610×W60×H134	Single Color	165,05 €
	QL-WB3W18-RGB								RGB	200,12 €
	QL-WB3W36-S	36*3W	36 LEDs	DC 24V	IP 65	15°/30°/45°	Aluminum	L1210×W60×H134	Single Color	264,08 €
	QL-WB3W36-RGB								RGB	303,28 €
	QL-WA1W18-S	18*1W	18 LEDs	DC 24V	IP 65	15°/30°/45°	Aluminum	L310×W60×H134	Single Color	123,38 €
	QL-WA1W18-RGB								RGB	158,45 €
	QL-WA1W36-S	36*1W	36 LEDs	DC 24V	IP 65	15°/30°/45°	Aluminum	L610×W60×H134	Single Color	205,49 €
	QL-WA1W36-RGB								RGB	240,56 €
	QL-WA1W72-S	72*1W	72 LEDs	DC 24V	IP 65	15°/30°/45°	Aluminum	L1210×W60×H134	Single Color	382,50 €
	QL-WA1W72-RGB								RGB	417,58 €

Product Picture	Model No.	Description	Unit
			1-50
	QL-DC-MN	<p><b>DMX Controller</b>  DMX512 Signal Output  54 Channels  Apply to simple lighting control environment</p>	156,00 €
	QL-DC-MG	<p><b>DMX 512 Program Controller</b>  Input Voltage:12V DC  DMX512 Signal Output  Write-in Dip address for lighting products  As master control  31 programs preset  DMX Input testing  DMX Signal input Debug</p>	120,00 €

Products Name	Products Name	Model No.	Description	Unit Price/pcs
				1-100
	Non-Waterproof Adaptor	QL-SNFP-30	Power: 30W Input: AC110V-240V Output: 12V / 24V CE ROHS	
	Non-Waterproof Adaptor	QL-SNFP-60	Power: 60W Input: AC110V-240V Output: 12V / 24V CE ROHS	14,60 €
	Non-Waterproof Power Supply	QL-SNFA-50	Power: 50W Input: AC110V/220V Output: 12V / 24V CE ROHS	19,00 €
	Non-Waterproof Power Supply	QL-SNFA-100	Power: 100W Input: AC110V/220V Output: 12V / 24V CE ROHS	25,00 €
	Non-Waterproof Power Supply	QL-SNFA-145	Power: 145W Input: AC110V/220V Output: 12V / 24V CE ROHS	28,00 €

Products Name	Products Name	Model No.	Description	Unit Price/pcs
	Non-Waterproof Power Supply	QL-SNFA-200	Power: 200W Input: AC110V/220V Output: 12V / 24V CE ROHS	44,00 €
	Non-Waterproof Power Supply	QL-SNFA-350	Power: 350W Input: AC110V/220V Output: 12V / 24V CE ROHS	52,00 €
	Waterproof Power Supply	QL-SWFA-30	Power: 30W Input: 170V-250V Output: 12V / 24V CE ROHS	13,60 €
	Waterproof Power Supply	QL-SWFA-60	Power: 60W Input: 170-240V Output: 12V / 24V CE ROHS	26,00 €
	Waterproof Power Supply	QL-SWFA-100	Power: 100W Input: 170V-240V Output: 12V / 24V CE ROHS	42,00 €
	Waterproof Power Supply	QL-SWFA-150	Power: 150W Input: 170-240V Output: 12V / 24V CE ROHS	61,00 €

Pictures	Model No.	Description	Unit	Unit Price
	QL-CN-A3	Connector with Wire for SMD3528 Strips		\$0,50
	QL-CN-A5	Connector with Wire for SMD5050 Single Color Strips	PCS	\$0,50
	QL-CN-B3	Connectors for SMD3528 Strips	PCS	\$0,50
	QL-CN-B5	Connectors for SMD3528 Single Color Strips	PCS	\$0,50
	QL-CN-C	Connector with Wire for RGB Strips	PCS	\$0,70
	QL-CN-D	Connectors for RGB Strips	PCS	\$0,70
	QL-CN-E	Connector with Wire for CCT Adjustable Strips	PCS	\$0,70
	QL-CN-F	Connectors for CT Adjustable Strips	PCS	\$0,70
	QL-CN-G2	Waterproof Connectors of Single-Color Strips	Pairs	\$1,60
	QL-CN-G4	Waterproof Connectors of RGB Strips	Pairs	\$1,60
	QL-CN-H	DC Connectors of Strips	Pairs	\$1,40